

## Solenoid Valve, Metal

### Construction


The GEMÜ 8259 2/2-way direct acting solenoid valve has a brass or stainless steel valve body. All medium wetted parts are made of FPM (standard on stainless steel body), NBR (standard on brass body), PTFE, EPDM, brass or stainless steel.

The electrical connection is made via a plug to DIN EN 175301-803 form A. The coil has isolation class F as standard. The valve is suitable for inert liquids and gases.

### Advantages

- Direct acting, normally open or normally closed
- Valve operates without minimum pressure differential ( $\Delta p$ )
- Excellent flow capability
- Compact design
- Simple coil replacement without tools (**Click-on®**)
- Suitable for vacuum applications
- Explosion protected solenoids acc. to ATEX available as an option
- UL and CSA approvals available
- Various threaded connections per nominal size
- M5 mounting thread

Sectional drawing GEMÜ 8259 (DN 3 - 5)

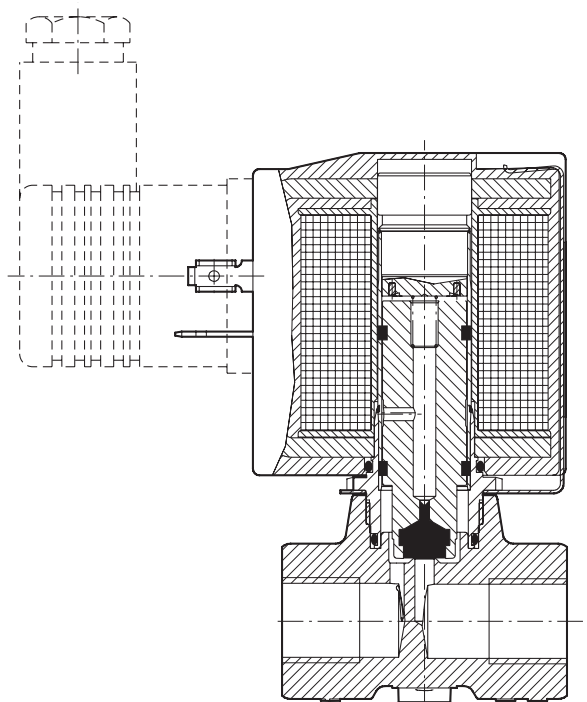

## Technical data

### Working medium

Inert gaseous or liquid media which have no negative impact on the physical and chemical properties of the body and seal material.

### Max. perm. viscosity of working medium

25 mm<sup>2</sup>/s (cSt)

**Note:** When used with contaminated media we recommend installing a strainer in front of the valve (on request)

### Perm. temperature of working medium

-10° to +90°C

Higher temperatures on request

### Ambient temperature

-10° to +50°C

### Mounting position

Optional, preferably coil vertically upwards

### Power consumption

#### AC operation:

Pull in / hold in

DN 2

15 VA / 12 VA

DN 3 - 5

45 VA / 35 VA

#### DC operation:

Pull in / hold in

DN 2

8 W / 7 W

DN 3 - 5

18 W / 17 W

### Protection class

IP 65 (with plug)

### Permissible voltage tolerance

±10 % to VDE 0580

### Rating

Continuously rated

Nominal size	Threaded socket connections	Operating pressure [bar]		Kv value	Weight
DN	DIN ISO 228	Control function Normally closed (Code 1)	Control function Normally open (Code 2)	[m <sup>3</sup> /h]	[kg]
2	G 1/8	0 - 10	-	0.15	0.33
	G 1/4	0 - 10	0 - 6		
	G 3/8	0 - 10	-		
3	G 1/8	0 - 20	-	0.21	0.57
	G 1/4	0 - 20	0 - 16		
	G 3/8	0 - 20	-		
4	G 1/8	0 - 12	-	0.35	0.57
	G 1/4	0 - 12	0 - 8		
	G 3/8	0 - 12	-		
5	G 1/8	0 - 6	-	0.50	0.57
	G 1/4	0 - 6	-		
	G 3/8	0 - 6	-		

### Wiring note:

Special wiring on request. When using electronic switches and additional wiring, carefully design out any potential residual currents upon installation.

## Order data

Body configuration	Code
2/2-way	D

Connection	Code
G 1/8 Threaded sockets DIN ISO 228	G1
G 1/4 Threaded sockets DIN ISO 228	G2
G 3/8 Threaded sockets DIN ISO 228	G3


Valve body material	Code
Brass MS	12
Stainless steel 1.4408	37

Seal material	Code
NBR (standard on brass body code 12)	2
FPM (standard on stainless steel body code 37)	4
PTFE	5
EPDM	14

Control function	Code
Normally closed	1
Normally open	2

Supply voltage	Code
110 V AC	110
230 V AC	230
24 V DC	24


Mains frequency	Code
50 Hz	50
DC	DC

Optional versions	K-Number
Coil protection class II 2 G EEx m II T4 ATEX marking  II 2 D T130°C	6419
Other versions acc. to ATEX on request	

Available voltages / Frequency		
<b>AC</b>	110 V AC 230 V AC	50 Hz 50 Hz
<b>DC</b>	24 V DC	-
Other voltages on request		

Order example	8259	3	D	G1	12	4	1	230	50	
Type	8259									
Nominal size		3								
Body configuration (code)			D							
Connection (code)				G1						
Valve body material (code)					12					
Seal material (code)						4				
Control function (code)							1			
Supply voltage (code)								230		
Mains frequency (code)									50	
Optional version (K-No.)										

## Spare parts

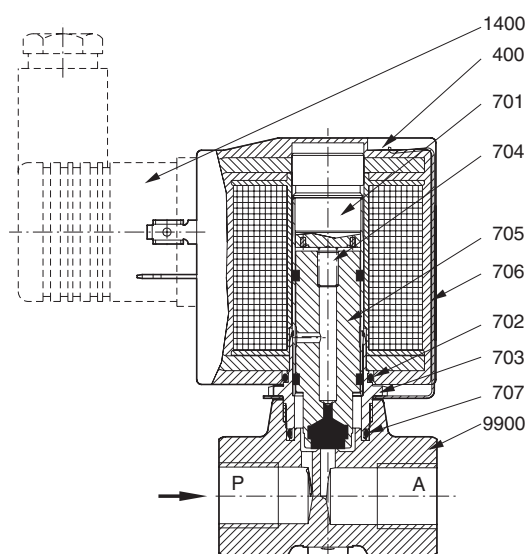


- 400 Solenoid
- 701 Bush
- \*702 Diaphragm
- 703 O-ring
- \*704 Compression spring
- \*705 Armature
- 706 Spring clip
- \*707 O-ring
- 1400 Plug (included)
- 9900 Valve body


All the parts marked \* are included in the wearing parts kit.  
When ordering spare parts, please state the complete valve order number.

## Dimensions

Nominal size DN 2

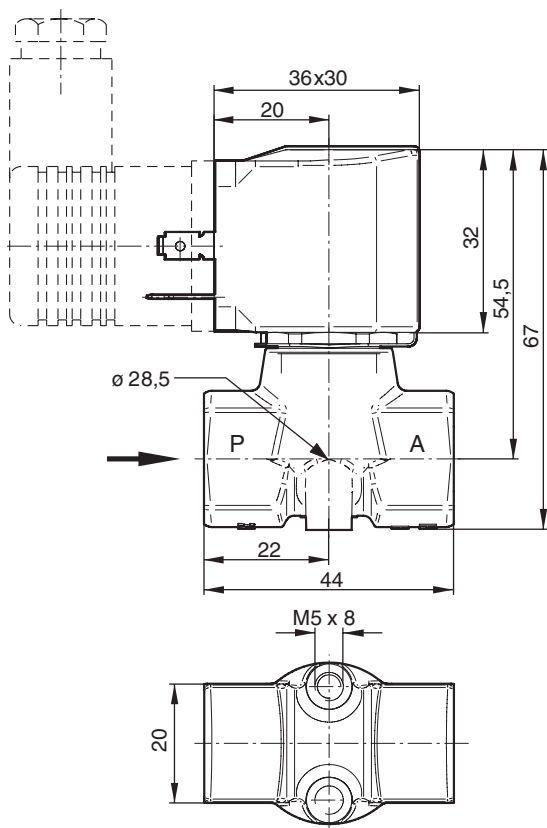

Nominal size DN 3 - 5

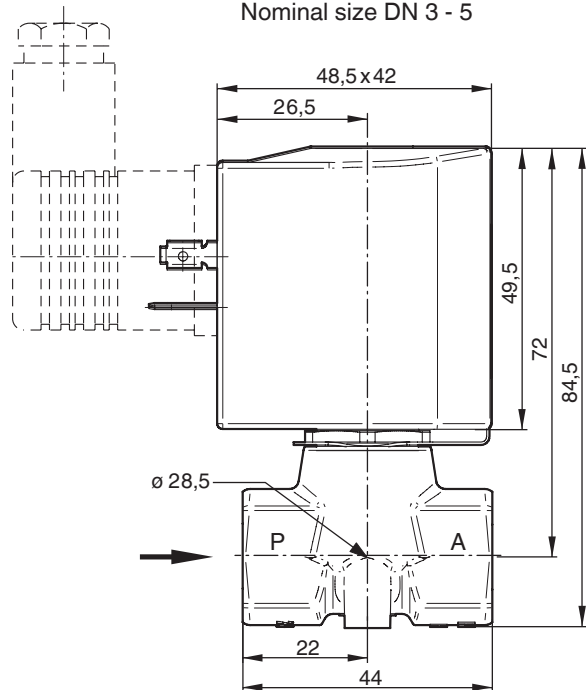

## Other metal solenoid valves



### GEMÜ 8253

Servo assisted solenoid valve  
with a positive lift diaphragm  
without pressure differential  
Brass or stainless steel  
DN 10 - 25 (0 - 16 bar)



### GEMÜ 8257

Servo assisted solenoid valve  
with a positive lift diaphragm  
without pressure differential  
Brass or stainless steel  
DN 8 - 12 (0 - 10 bar)



### GEMÜ 8258

Servo assisted solenoid valve  
with pressure differential  
Brass or stainless steel  
DN 8 - 15 (0.1 - 16 bar)

For other solenoid valves, accessories and other products, please see our Product Range catalogue and Price List.  
Contact GEMÜ.

**GEMÜ®** VALVES, MEASUREMENT  
AND CONTROL SYSTEMS

